


**SPEC SHEET ENGINEERED EUROPEAN**

<b>WIDTH</b>	5 1/4" • 7" • 8 5/8" • 10 1/4" • 12"
<b>SPECIES</b>	OAK
<b>GRADES</b>	CLASSIC   PRIME   NATURE
<b>GRAIN PATTERNS</b>	LIVE SAWN
<b>SURFACE</b>	UNFINISHED   PREFINISHED
<b>LENGTH</b>	STANDARD   2-10' • APPROXIMATELY 4' // SPECIAL   4-10' • CAN BE ORDERED UP TO 12'
<b>THICKNESS</b>	STANDARD   5/8" 3.5 MM WEAR LAYER • 11.5 PLY BALTIC BIRCH SPECIAL   3/4" 5.5 MM WEAR LAYER • 14.5 PLY BALTIC BIRCH
<b>WEAR SURFACE</b>	PRE-SANDED WHEN IT LEAVES THE MILL, WILL STILL NEED SANDED ON SITE.
<b>MACHINING</b>	TONGUE + GROOVE AND END MATCHED, SQUARE EDGE BACK SCORED 4" CENTERS + PRE-SANDED
<b>BEVEL</b>	2 SIDED • STANDARD 1/8" OR MICRO BEVEL 1/16" // 4 SIDED • STANDARD 1/8" OR MICRO BEVEL 1/16"
<b>INSTALLATION</b>	CAN BE NAILED, STAPLED, OR GLUED. WHEN GLUING PLEASE FOLLOW NOFMA/NWFA RECOMMENDATIONS.

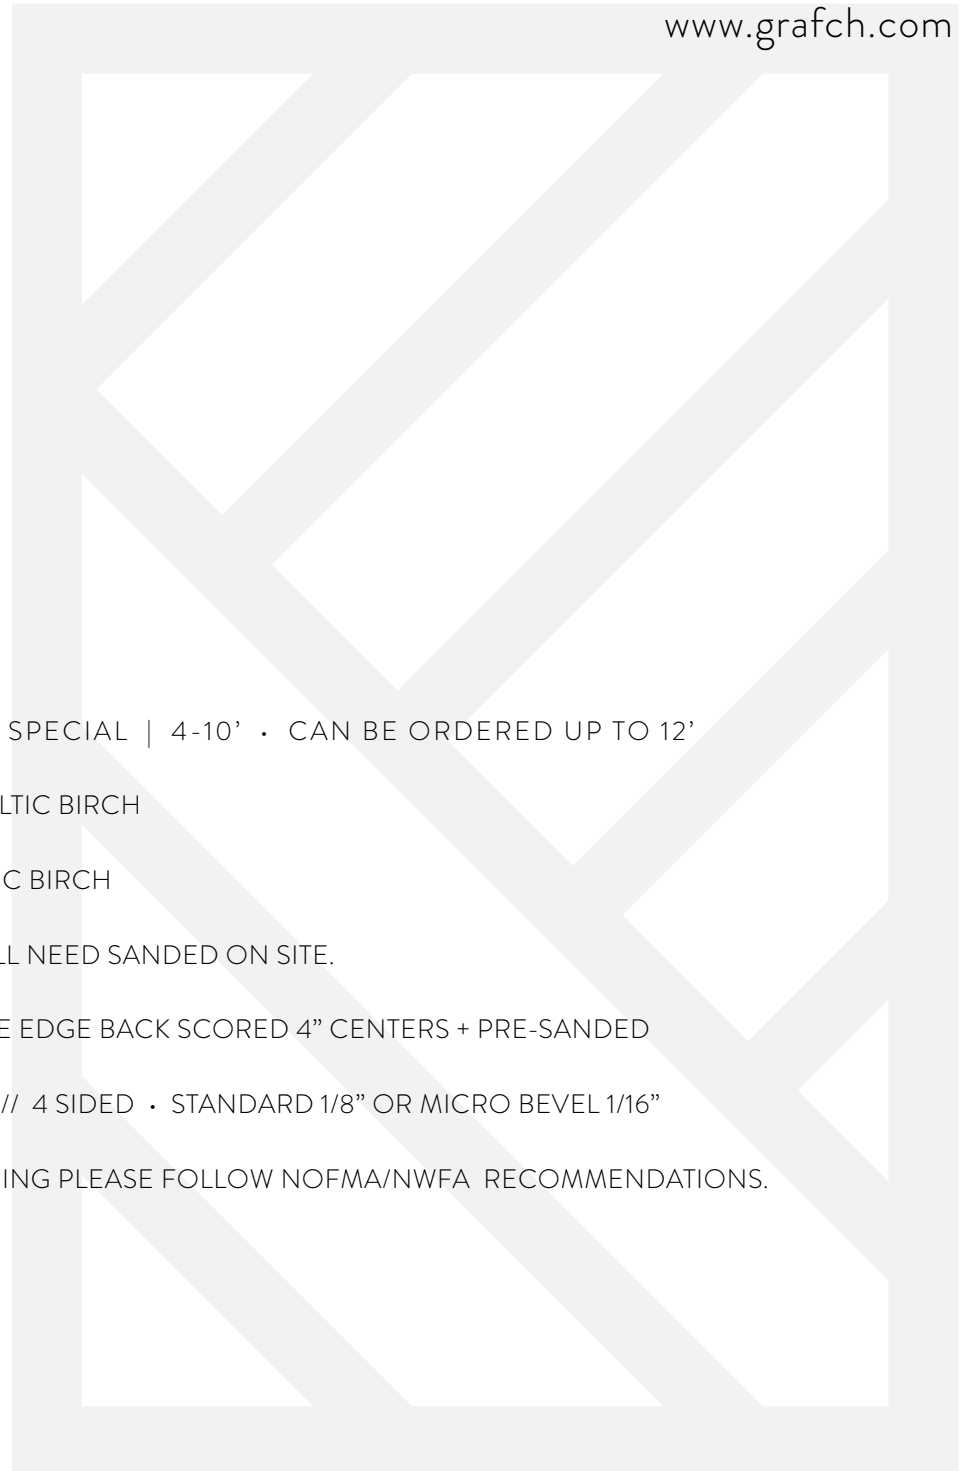

**SPEC SHEET ENGINEERED EUROPEAN**

**GRADE SPECIFICATIONS**

**CLASSIC ·**

Grain can be straight and wavy.

Natural colour variations.

Flat Sawn.

Kissing sap allowance 1-10%.

Sound, healthy knots up to 60-70mm.

Knots filled, all knots are small and not open.

Black knots up to 30mm.

End cracks allowed up to 10cm.

Kissing Heart allowed.

**PRIME ·**

Grain is a variation of straight grain and medullary rays on boards.

Colour fairly uniform.

Flat Sawn.

No sap allowed.

Occasional healthy pin knots up to max 10mm.

No cracks allowed.

**NATURE ·**

Grain is straight with natural grain variation allowed.

Flat Sawn.

No sap allowed.

Healthy sound knots allowed up to 45mm.

Black knots allowed up to 20mm.

No cracks allowed.

**PACKAGE GUIDELINES**

All ZENON packaging contains random length boards to create a truly transitional and natural effect in any environment.

Depending on the requested type of flooring, the boards can range from 600mm – 3000mm in length. Please contact us for any additional information required.